


GUM REMOVER

As MOSMATIC surface cleaners are already known in the surface cleaner market, we would like to present the „New Star“ in our professional cleaning line. The „FL-AH-KAU“. It is based on the FL-AH surface cleaner with an added gum remover.


You may have noticed a lot of streets in public places, like municipal parks, railroad stations and schools are covered with chewing gum. This is the perfect place to use our new cleaner with the gum remover. The special gum remover nozzle is mounted on the back of the cleaner. The right hand gun is for the surface cleaner and the left hand gun is for the gum remover or other tough spots. The flat angle of the nozzle lifts and breaks up the gum for easy removal.

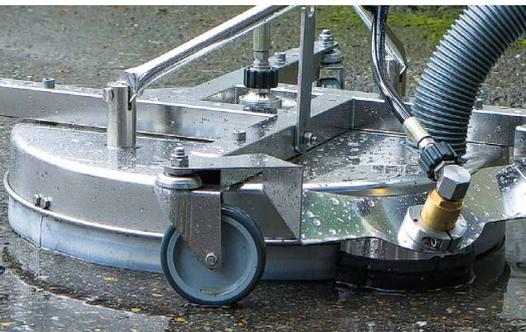

Inlet : G3/8" F
 Pressure : 350 bar
 Temperature : 120°C



FL-AHB-KAU 750

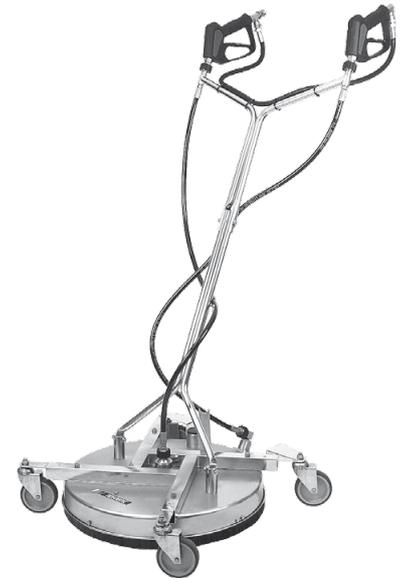

FL-AHB-KAU 520

Name	Part No.	ø	Weight	Swivel	Rotor Arm	Nozzles	HP-Gun	Stainless Steel Castor	Gum Remover Nozzle
FL-AHB-KAU 520	80.766	520	20kg	1x DYCI	2x 1/8" NPTF	2x 1503	2x	4x ø 100	Must be ordered separately! Part No. 29.102
FL-AHK-KAU 520*	80.767	520	20kg	1x DYCI	2x 1/8" NPTF	2x 1503	2x	4x ø 100	
FL-AHB-KAU 750	80.768	750	26.5kg	1x DYCI	3x 1/8" NPTF	3x 1503	2x	4x ø 100	

* with Plastic Ring instead of brush ring

FEATURES

Gum Remover

The special gum remover nozzle is mounted on the back of the cleaner. The right hand gun is for the surface cleaner and the left hand gun is for the gum remover or other tough spots.




Gum Remover

Part No. 29.102

Recovery System

This feature is a must for anyone looking for the perfect cleaning solution.

This specially designed cleaning feature will allow you to recover the water and dirt from your cleaning area.



Recycling ø 50mm

Housing

Rotor Arm

Height Adjustable

Stainless steel guard for extra strength and stability. Efficient cleaning with adjustable housing.



Premium Quality

Four 100mm stainless steel castors with custom mounting brackets ensure easy maneuvering even in tight spaces.

Stainless Steel Castor

Part No. 80.956

High Pressure Rotor Arms

Both styles can withstand up to 500 bar, are precision welded and balanced.



2cw2 (2 Arms / 2 Nozzles)

Part No. 82.946 (diameter 470mm)

3cw3 (3 Arms / 3 Nozzles)

Part No. 82.947 (diameter 700mm)

Swiss Engineering

High rpm stainless steel swivel features reinforced self lubricated stainless steel ball bearings for improved performance. The dual spring based carbide seal system, guarantees long lasting operation.



DYCI Swivel

Part No. 55.253